



MODEL
36PF-OSC-W

CATEGORY
Circulation

DESCRIPTION
36" circulation fan with OSHA guards, 2-speed motor with pull chain switch, oscillation assembly and pedestal, designed for agriculture, horticulture and industrial use.

FEATURES

- Totally enclosed, maintenance-free ball bearing, thermally protected permanent split capacitor motor with two-speed pull chain.
- Durable polyester coated fan guard meets OSHA requirements.
- Ten foot, 115 volt grounded cord attached.
- Powder coated 13-16 gauge steel pedestal, adjusts from 3½ to 6 ft (wheel kit available).

DIMENSIONS


Model	A	B	C	D
36PF-OSC-W	40 ³ / ₈ "	6 ³ / ₄ "	18 ³ / ₄ "	32"

PERFORMANCE

11,753 / 7507 CCFM

TEST NUMBER

Schaefer 0200 / Schaefer 0201

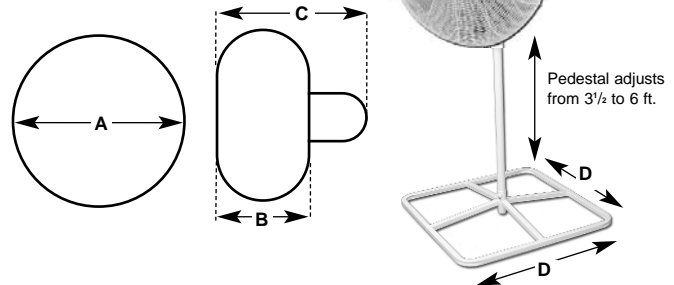

MOTOR

Model	HP	Type	Voltage	Amps	RPM
CS300-OSC	1/2 - 2 speed	TEAO	115	6.0 / 3.0	1075 / 800

BLADE

Model	Type	Wings	Bore Size	Pitch
AFB-3600	Aluminum	3	1/2"	15°

SHIPPING

	Weight	Box Dimension	UPS	Pallet Quantity
• Fan	72 lbs	41 x 41 x 20	No	5
• Pedestal	28 lbs	36 x 7 x 34	Yes	8

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change.



800-779-3267 • Fax: 320-251-2922
sales@schaeferfan.com • www.schaeferfan.com