



MODEL

36PF

CATEGORY

Circulation

DESCRIPTION

36" circulation fan with OSHA guards and 2-speed motor with pull chain switch and pedestal, designed for agriculture, horticulture and industrial use.

FEATURES

- Totally enclosed, maintenance-free ball bearing, thermally protected permanent split capacitor motor with two-speed pull chain.
- Durable polyester coated fan guard meets OSHA requirements.
- Ten foot, 115 volt grounded cord attached.
- Powder coated pedestal adjusts from 3½ to 6 ft (wheel kit available).

DIMENSIONS



Model	A	B	C	D
36PF	40 ³ / ₈ "	6 ³ / ₄ "	14 ¹ / ₄ "	32"

PERFORMANCE

12,121 / 8753 CCFM

TEST NUMBER

Schaefer 0064 / Schaefer 0065

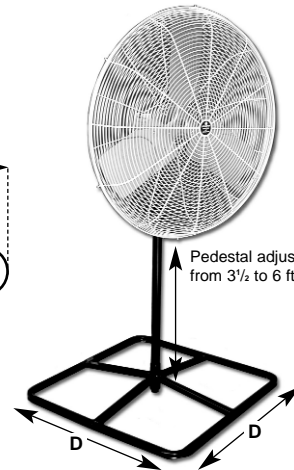

MOTOR

Model	HP	Type	Voltage	Amps	RPM
CS300	1/2 - 2 speed	TEAO	115	5.2	1075

BLADE

Model	Type	Wings	Bore Size	Pitch
AFB-3600	Aluminum	3	1/2"	15°

SHIPPING

	Weight	Box Dimension	UPS	Pallet Quantity
• Fan	59 lbs	41 x 41 x 15	No	5
• Pedestal	28 lbs	36 x 7 x 34	Yes	8

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change.



800-779-3267 • Fax: 320-251-2922
 sales@schaeferfan.com • www.schaeferfan.com