


GUARD MOUNTED DIRECT DRIVE EXHAUST FANS

Bolts directly
to the wall

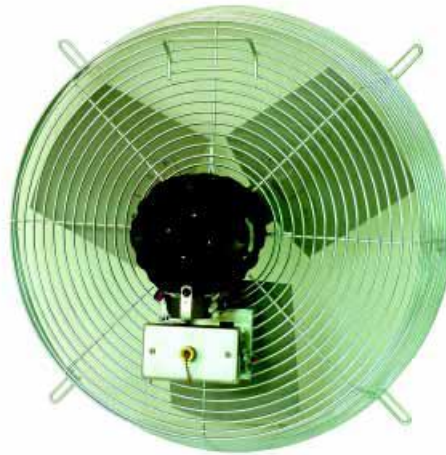

Can be used
with or without
external shutter.

- MOTORS** 120V, 1-phase totally enclosed
permanently lubricated - UL Listed
- 1/12 HP motor is 3-speed sleeve bearing shaded pole type
 - 1/8 HP motor is 3-speed sleeve bearing permanent split capacitor
 - 1/4 HP motor is 2-speed ball bearing permanent split capacitor

SWITCH Pull chain

CORD NONE - Junction box provided for direct wiring

BLADE Aluminum

GUARDS Steel spiral wire

FAN DIMENSIONS (inches)		
SIZE	Width	Length
10"	12.60	12.60
12"	14.75	14.75
14"	16.78	16.78
16"	18.80	18.80
18"	21.00	21.00
20"	23.43	23.43
24"	27.93	27.93
30"	33.75	33.75

Note: Rough in hole size is 1/2" inch larger than fan blade size.

SIZE	UPC CODE 686334	MODEL NUMBER	HP	CFM			AMPS HIGH	WT. (LBS.)	LIST PRICE
				HIGH	MED	LOW			
10"	868952	CE 10-D	1/12	2280	1825	1325	1.0	11	195
12"	798501	CE 12-D	1/12	2750	2200	1600	1.1	12	220
14"	868969	CE 14-D	1/8	4475	3650	2490	2.0	17	235
16"	868976	CE 16-D	1/8	5110	4180	2840	2.1	18	245
18"	798495	CE 18-D	1/8	5750	4700	3200	2.2	19	270
20"	868983	CE 20-D	1/4	5850	-	4165	2.3	34	350
24"	798488	CE 24-D	1/4	6800	-	5000	2.5	38	390
30"	798471	CE 30-D	1/4	7900	-	6000	2.7	42	455

OPTIONAL WALL SHUTTERS

FAN SIZE	UPC CODE 686334	MODEL NUMBER	WT. (lbs.)	LIST PRICE
10"	868433	CES-10G	5	50
12"	798556	CES-12G	5.5	70
14"	868457	CES-14G	6.5	85
16"	851473	CES-16G	8	100
18"	798563	CES-18G	9	120
20"	797528	CES-20G	10	135
24"	798570	CES-24G	13	150
30"	798587	CES-30G	19	175

SHUTTER MOUNTED DIRECT DRIVE EXHAUST FANS

**Installs on
inside wall**



**Eliminates need for
external framing & shutter.**

- MOTORS** 120V, 1-phase totally enclosed permanently lubricated - UL Listed
- 1/12 HP motor is 3-speed sleeve bearing shaded pole type
 - 1/8 HP motor is 3-speed sleeve bearing permanent split capacitor
 - 1/4 HP motor is 2-speed ball bearing permanent split capacitor

SWITCH Pull chain

CORD NONE - Junction box provided for direct wiring

BLADE Aluminum

GUARDS Steel spiral wire

FAN DIMENSIONS (inches)		
SIZE	Width	Length
10"	13.13	13.13
12"	15.13	15.13
14"	17.13	17.13
16"	19.00	19.00
18"	21.13	21.13
20"	23.13	23.13
24"	27.13	27.13
30"	33.13	33.13

Note: Rough in hole size is 1/2" inch larger than fan blade size.

SIZE	UPC CODE 686334	MODEL NUMBER	HP	CFM			AMPS HIGH	WT. (LBS.)	LIST PRICE
				HIGH	MED	LOW			
10"	868990	CE 10-DS	1/12	2280	1825	1325	1.0	11	230
12"	798624	CE 12-DS	1/12	2750	2200	1600	1.1	16	260
14"	869003	CE 14-DS	1/8	4475	3650	2490	2.0	17	330
16"	869010	CE 16-DS	1/8	5110	4180	2840	2.1	18	345
18"	798631	CE 18-DS	1/8	5750	4700	3200	2.2	25	375
20"	869027	CE 20-DS	1/4	5850	-	4165	2.3	34	445
24"	798648	CE 24-DS	1/4	6800	-	5000	2.5	47	495
30"	798655	CE 30-DS	1/4	7900	-	6000	2.7	54	620

VENTURI MOUNTED DIRECT DRIVE EXHAUST FANS

**Installs on
inside of wall**



**Can be used with
external shutter.**

- MOTORS** 120V, 1-phase totally enclosed permanently lubricated - UL Listed
- 1/12 HP motor is 3-speed sleeve bearing shaded pole type
 - 1/8 HP motor is 3-speed sleeve bearing permanent split capacitor
 - 1/4 HP motor is 2-speed ball bearing permanent split capacitor

SWITCH Pull chain

CORD NONE - Junction box provided for direct wiring

BLADE Aluminum

GUARDS Steel spiral wire

FAN DIMENSIONS (inches)		
SIZE	Width	Length
10"	12.63	12.63
12"	14.50	14.50
14"	17.13	17.13
16"	19.13	19.13
18"	21.00	21.00
20"	23.13	23.13
24"	29.50	29.50
30"	35.50	35.50

Note: Rough in hole size is 1/2" inch larger than fan blade size.

SIZE	UPC CODE 686334	MODEL NUMBER	HP	CFM			AMPS HIGH	WT. (LBS.)	LIST PRICE
				HIGH	MED	LOW			
10"	869034	CE 10-DV	1/12	2280	1825	1325	1.0	11	230
12"	798662	CE 12-DV	1/12	2750	2200	1600	1.1	17	260
14"	869041	CE 14-DV	1/8	4475	3650	2490	2.0	17	330
16"	869058	CE 16-DV	1/8	5110	4180	2840	2.1	18	345
18"	798679	CE 18-DV	1/8	5750	4700	3200	2.2	26	375
20"	869065	CE 20-DV	1/4	5850	-	4165	2.3	34	445
24"	798686	CE 24-DV	1/4	6800	-	5000	2.5	48	495
30"	798693	CE 30-DV	1/4	7900	-	6000	2.7	55	620

OPTIONAL WALL SHUTTERS

FAN SIZE	UPC CODE 686334	MODEL NUMBER	WT. (lbs.)	LIST PRICE
10"	868433	CES-10G	5	50
12"	798556	CES-12G	5.5	70
14"	868457	CES-14G	6.5	85
16"	851473	CES-16G	8	100
18"	798563	CES-18G	9	120
20"	797528	CES-20G	10	135
24"	798570	CES-24G	13	150
30"	798587	CES-30G	19	175